


Insulators up to 1.5 kV DC

Type: FTD1.5

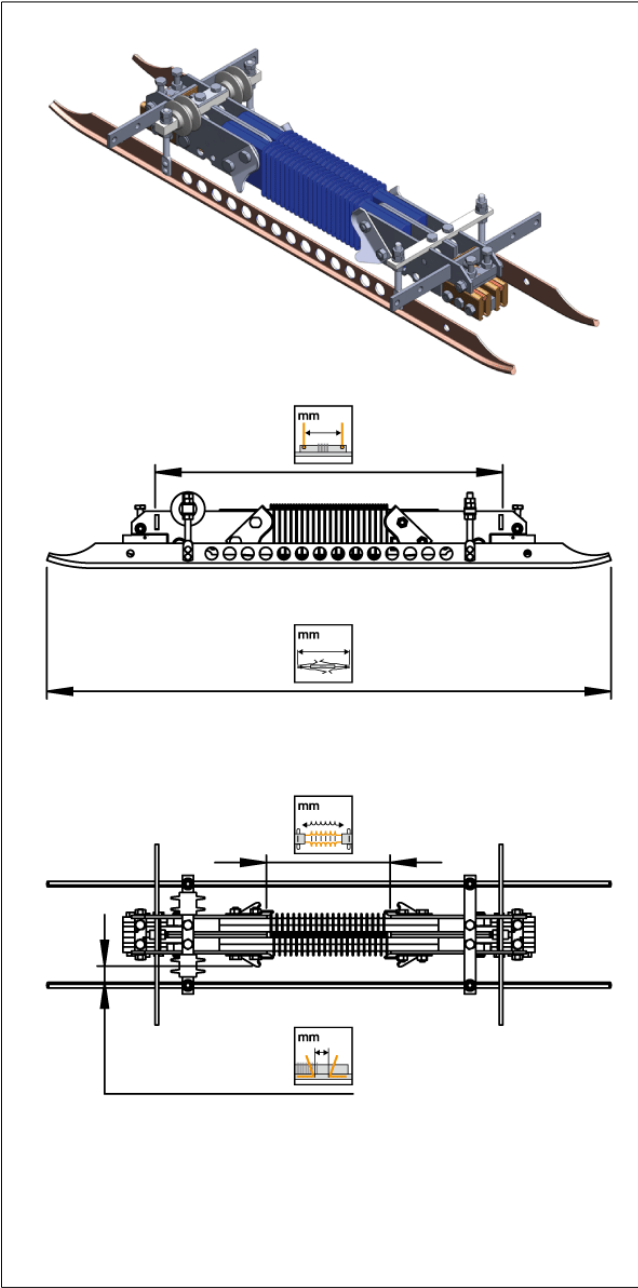

Material

GRP/Silicone rubber, Cu, CuNiSi, stainless steel

Application

1.5 kV DC section insulator for tramways with 2 contact wires.

For speed up to 80 km/h.

SML of insulator beam: 80 kN.

Remark

With adjusting screws for contact wire splices

A) Only 1 isolator

Item-no.



Item-no.	mm ²	mm	kN	mm	mm	mm	mm	Kg	
655.321.501	80-150	5.6-6.9	max. 32	435	610	35	1000	12.5	A
655.328.613	80-150	5.6-6.9	max. 2x20	435	610	35	1000	16.5	